



THE 4 COMPONENTS OF CLICKFIT EVO



1. CLICKFIT EVO HANGER BOLT

- Fully preassembled hanger bolt Height adjustable

- Height adjustable
 Compensates for roof irregularities up to 10 degrees
 Can be rotated by 360 degrees
 Self-aligning click connection: easy and quick
 Mounting rail can be installed horizontally or vertically
 For both landscape and portrait positioning of solar panels
 For new builds and existing buildings
 Available in three lengths and two thicknesses for wood purlins/trusses



2. MOUNTING RAIL

- 30% stronger
- 30% lighter
- Suitable for larger roof spans



3. UNIVERSAL MODULE CLAMP

- Suitable for all framed solar panels
- Can be used as centre clamp or as end clamp in combination with end cap
- Standard assembly
- Including equipotential bonding for the solar panels
 Available in grey and black



4. END CAP

- \bullet End cap holds the module clamp in its position
- \bullet Elongated end cap to allow for aesthetically pleasing finish
- Available in grey and black





EASY INSTALLATION ON THE ROOF

ClickFit EVO for EPDM and Bitumen Roofs

ClickFit EVO for EPDM and Bitumen Roofs has been specially developed for use with the well-known ClickFit EVO system on EPDM and bitumen roofs, as are often found on business premises with pitched roofs. This straightforward system consists of just four components and can be installed on both existing and new roofs. The preassembled hanger bolt features the familiar ClickFit Evo click connection. The unique universal properties of this system let you install solar panels quickly and easily on pitched roofs.

The hanger bolt compensates for roof irregularities of up to 10 degrees

With the ClickFit EVO Hanger Bolt, you can quickly install solar panels on all types of EPDM and bitumen roofs. The hanger bolt is provided pre-assembled and the flexible adapter allows you to easily and quickly compensate for roof irregularities of up to 10 degrees. Using the universal ClickFit EVO click connection fitted to the hanger bolt as standard, you can simply carry on working with familiar components from the ClickFit EVO product line, such as universal rails, module clamps and end caps. As well as being suitable for EPDM and bitumen roofs, the hanger bolt can also be used on corrugated, steel and Arabic tiles.

Mounting on an EPDM and bitumen roof

Not all types of EPDM and bitumen roofs are suitable for mounting with hanger bolts: in this case the thermal effect, and thus the watertightness, of the roof covering is affected as soon as it has been drilled into. Therefore, consult a roofing specialist for advice before installing.


If the roof substructure is made from an engineered wood board with a minimum thickness of 50 mm, you can install the hanger bolts where you want. Otherwise, you must first locate the purlins/trusses. The hanger bolt must then be mounted in the purlin/truss. It is also important to ensure the area is waterproofed again when mounting the hanger bolt on an EPDM or bitumen roof. To do this, use a sealant suitable for the type of roof covering and the corresponding washer. You can even include these in your original order, it couldn't be easier! The project plan created by our calculator includes details of exactly how much sealant and how many washers you require.

ADVANTAGES FOR THE INSTALLER

- ✓ Both landscape and portrait placement
- ✓ Four components on the roof
- Only one tool needed
- Quick and easy installation
- 20-year product warranty

ADVANTAGES FOR YOUR CUSTOMER

- √ 100% waterproof
- Aesthetic design, also available in black
- Comprehensively tested
- 20-year product warranty

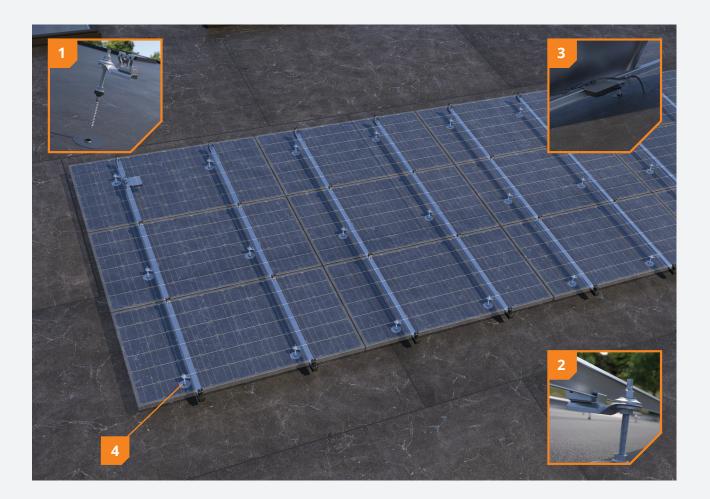

1 Unique hanger bolt

The hanger bolt is delivered in preassembled form. Using the flexible adapter, the hanger bolt can also compensate for roof irregularities of up to 10 degrees.

Fitted with a ClickFit EVO click connection

The hanger bolt features a self-aligning click connection. This makes it easy to install the mounting rail from above.

Integrated cable management

Cables and plugs can be held in place neatly and securely at all times in both the click connection on the hanger bolt and the cable clip. The optimizer can also be easily clicked onto the cable clip.

4 Always the right size

The universal module clamp is suitable for all framed solar panels. It can be used as a central module clamp or – in combination with an end cap or end clamp support – as an end clamp.

ROOF FASTENERS



ClickFit EVO Hanger Bolt

M10x200mm 1008011 M10x250mm 1008012 M12x250mm 1008013 M12x300mm 1008014 M12x350mm 1008015 [DTO]

MOUNTING RAIL



ClickFit EVO Mounting rail

 Mounting rail 1188mm
 1008131

 Mounting rail 2338mm
 1008132

 Mounting rail 3488mm
 1008133

 Mounting rail 3500mm
 1008007

 Mounting rail 4638mm
 1008134

 Mounting rail 5770mm
 1008135

MODULECLAMP & END CAP



ClickFit EVO Module Clamp Universal grey 1008020



ClickFit EVO Module Clamp Universal black 1008020-B



ClickFit EVO Mounting rail End cap grey 1008060



ClickFit EVO Mounting rail End cap black 1008060-B



ClickFit EVO End Cap without end clamp support grey 1008066



ClickFit EVO End Cap without end clamp support black 1008066-B



ClickFit EVO End Clamp Support grey 1008065



ClickFit EVO End Clamp Support black 1008065-B

ACCESSOIRES



ClickFit EVO Mounting Rail Connector Piece 1008061



ClickFit EVO Mounting Rail Cable clip optimiser ready 1008062



ClickFit EVO self-drilling sheet metal screw 1003015 (required for vertical rail installation)



ClickFit EVO Auxiliary set with cable clip 1008064



ClickFit EVO bit torx 30 1008069



Illbruck Endurance Adhesive for EPDM Roofing 1008086



Shell Tixophalte Kit for Bitumen Roofing 1003900



Hanger Bolt Washer Inox 80mm 1003070

Calculator

In the Esdec calculator you can manage and calculate all your projects, for both pitched and flat roofs. One platform with all Esdec mounting systems for the most reliable calculation of your project.



Save time: manage all your projects on one platform



One calculator for projects on pitched and flat roofs



All calculations are based on extensive testing and the

latest safety standards

Go to eu.esdec.com/en/calculator



Warranty

ClickFit EVO meets all of the requirements and standards that currently apply. ClickFit EVO comes with a unique 20-year warranty, thus ensuring the system's quality.



Use of premium high tech materials



Extensively tested



BDA/KIWA certification



20 years' warranty



